



# Polar diagram

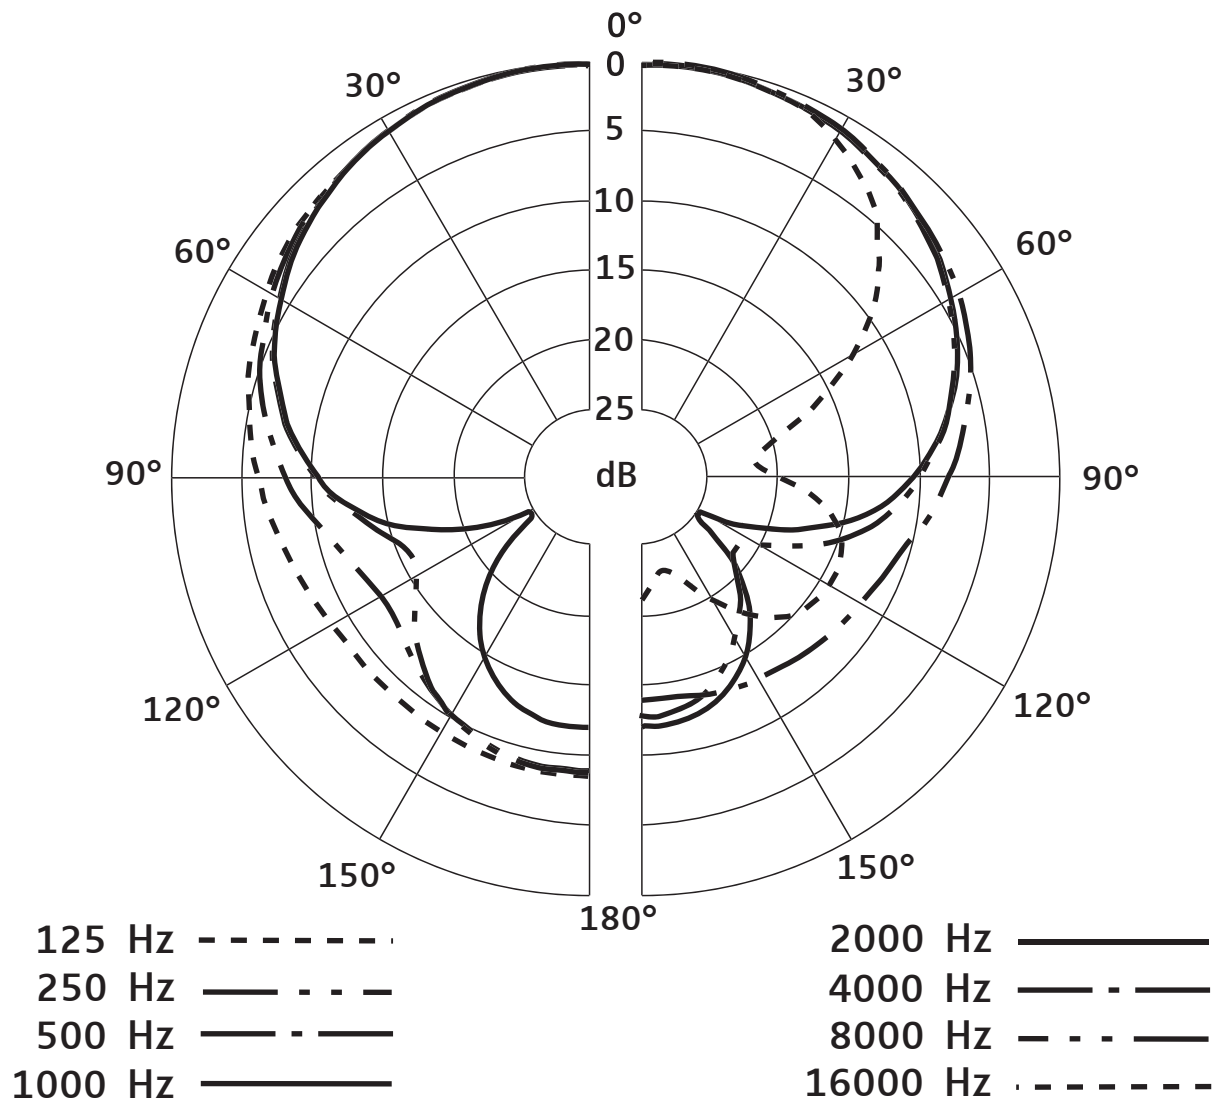

# Frequency response curve

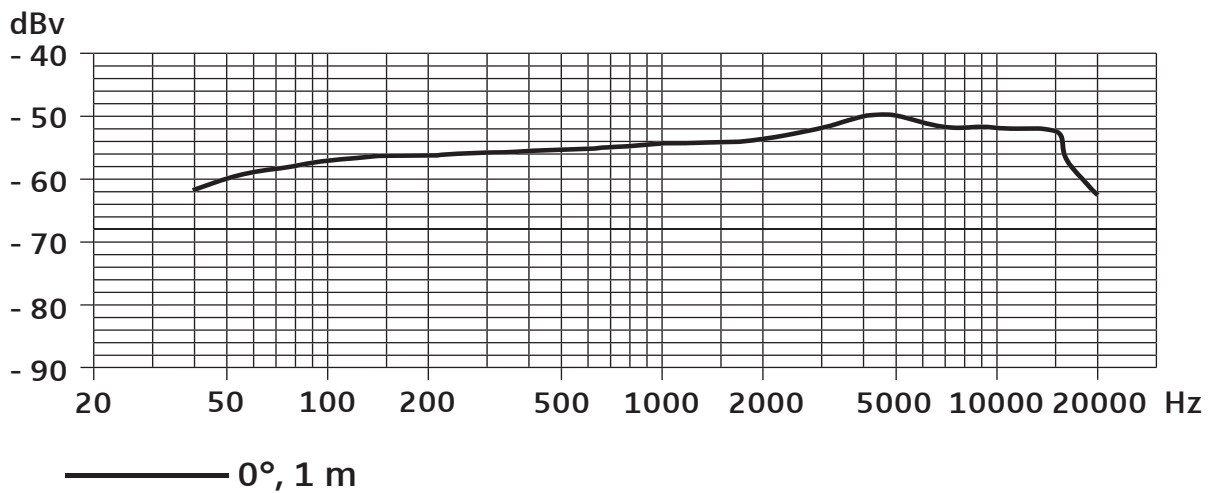

## Specifications

Transducer principle	dynamic
Frequency response	40.....16,000 Hz
Pick-up pattern	super-cardioid
Sensitivity (free field, no load at 1 kHz)	1.8 mV/Pa
Nominal impedance	350 $\Omega$
Min. terminating impedance	1 k $\Omega$
Connector	XLR-3
Weight	330 g
Dimensions	$\emptyset$ 46 x L 185 mm